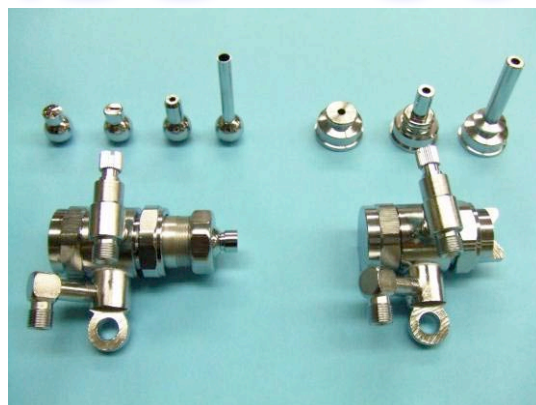


## AUTOMATIC SPRAY GUN

## ASS-305

**FEATURES**

1. Essential air pressure of only 0.2-0.3Mpa for operation.
2. Extremely reliable and stable as the piston stroke is standardized regardless of discharging quantity.
3. Discharging quantity is easily adjustable by the Quantity Adjusting Screw.
4. Spray Pattern is selectable by various types of nozzle.

**Spray Pattern**

Distance Nozzle	100mm	200mm	300mm	500mm
Circle 1	50 x 50	80 x 80	100 x 100	130 x 130
Circle 2	25 x 25	40 x 40	55 x 55	90 x 90
Circle 3	15 x 15	30 x 30	45 x 45	60 x 60
Elliptical	50 x 100	70 x 140	90 x 200	120 x 260

Liquid Pressure: 0.15 Mpa    Air Pressure: 0.4 Mpa

**Maximum Spray Quantity**

Nozzle LIQ Pressure	Circle 1	Circle 2	Circle 3	Circle 4	Elliptical
0.05 Mpa	700cc	650cc	700cc	300cc	900cc
0.10 Mpa	1100cc	1000cc	1000cc	500cc	1400cc
0.15 Mpa	1750cc	1300cc	1450cc	600cc	1750cc
0.20 Mpa	1750cc	1600cc	1750cc	650cc	—
0.30 Mpa	2250cc	2050cc	2250cc	700cc	—